


The most effective,  
cost-efficient and versatile  
cover system on the market

- Erosion Control
- Dust Control
- Waste Cover



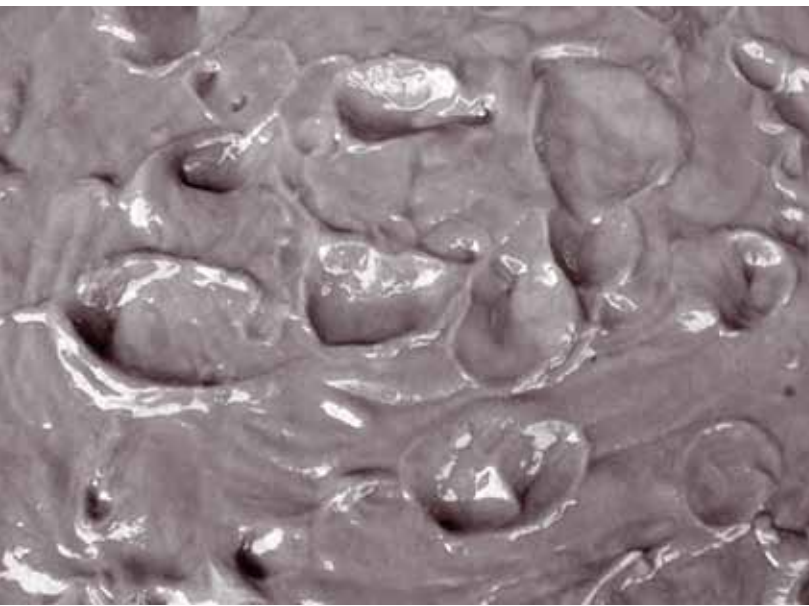

**Contact us today for  
more information.**



LSC Environmental Products, LLC  
800-800-7671 or 607-625-3050  
[www.lscenv.com](http://www.lscenv.com)

## **Composition**

Posi-Shell® is a patented blend of clay binders, reinforcing fibers, and polymers that, when mixed with water, produces a spray-applied mortar forming a thin layer of durable stucco. Posi-Shell will adhere to any surface or topography.

Posi-Shell's unique properties also enable the use of durability enhancers to achieve long-term coatings that remain resilient to erosion for more than a year.

---

## **Mixing and Application**

Mixing is accomplished using LSC Equipment or standard hydroseeding units.

Mixing and application can be completed with one operator, and typically takes 45-60 minutes. Clean up takes about 10 minutes.

---

## **Brief Specifications**

- Non-flammable
- Adheres to any surface
- Up to 95% water shed (run off)
- Durability from overnight to years with minimal maintenance

## **Packaging**

**Bags:** 50 lb. (22.7 kg.)  
60 Bags per pallet

**Bulk Sacks:** 500 lb (227 kg.) 4 sacks per pallet

Technology described herein may be covered by one or more patents or pending patent applications. See website for patent details. Posi-Shell is registered with the U.S. Patent and Trademark Office.